


## COUPANTES DIAGONALES



DIN 5749

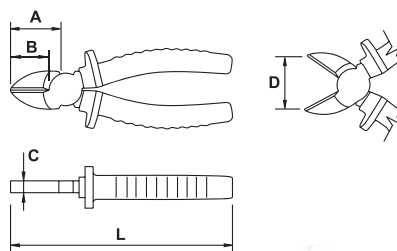


| COD   | L   | A  | B  | C  | D  |     |     |     |     |   |   |
|-------|-----|----|----|----|----|-----|-----|-----|-----|---|---|
| 62343 | 160 | 25 | 20 | 10 | 25 | 3   | 2,2 | 1,5 | 210 | 6 | 5 |
| 62540 | 190 | 32 | 26 | 11 | 29 | 3,2 | 2,5 | 1,5 | 250 | 6 | 5 |

Cr-V

## COUPANTES RENFORCEES



DIN 5749

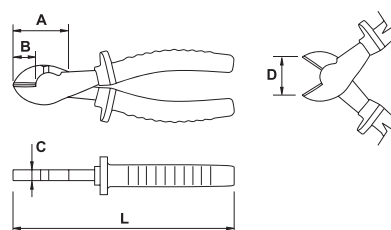


| COD   | L   | A  | B  | C  | D  |     |     |     |     |   |   |
|-------|-----|----|----|----|----|-----|-----|-----|-----|---|---|
| 62344 | 180 | 43 | 21 | 11 | 25 | 3,2 | 2,5 | 2   | 350 | 6 | 5 |
| 62370 | 200 | 48 | 21 | 11 | 21 | 3,5 | 2,7 | 2,2 | 380 | 6 | 5 |

## COUPANTES DEVANT



DIN 5748

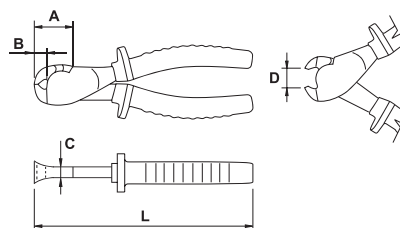


| COD   | L   | A  | B   | C  | D   |   |     |   |     |   |   |
|-------|-----|----|-----|----|-----|---|-----|---|-----|---|---|
| 62345 | 160 | 27 | 9,0 | 11 | 9,0 | 3 | 2,5 | 2 | 250 | 6 | 5 |

Cr-V

## COUPANTES DEVANT ELECTRICIEN



DIN 5748

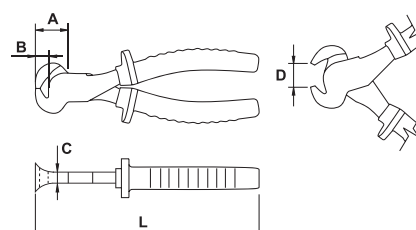


| COD   | L   | A  | B   | C  | D  |     |     |   |     |   |   |
|-------|-----|----|-----|----|----|-----|-----|---|-----|---|---|
| 62346 | 160 | 20 | 9,0 | 11 | 19 | 3   | 2,3 | 2 | 250 | 6 | 4 |
| 62348 | 200 | 22 | 11  | 14 | 19 | 3,5 | 2,8 | 2 | 410 | 6 | 4 |

Cr-V

## PINCES À DÉNUDER



DIN 5743



| COD   | L   |         | A  | B  | C   | D  |     |   |   |  |  |  |
|-------|-----|---------|----|----|-----|----|-----|---|---|--|--|--|
| 62349 | 160 | 0,5-6mm | 44 | 37 | 9,0 | 21 | 170 | 6 | 5 |  |  |  |

Cr-V



Tendre  
20Kg/mm<sup>2</sup> - 200N/mm<sup>2</sup>



Moyen  
75Kg/mm<sup>2</sup> - 750N/mm<sup>2</sup>



Dur  
180Kg/mm<sup>2</sup> - 1800N/mm<sup>2</sup>



Corde de piano  
230Kg/mm<sup>2</sup> - 2300N/mm<sup>2</sup>