




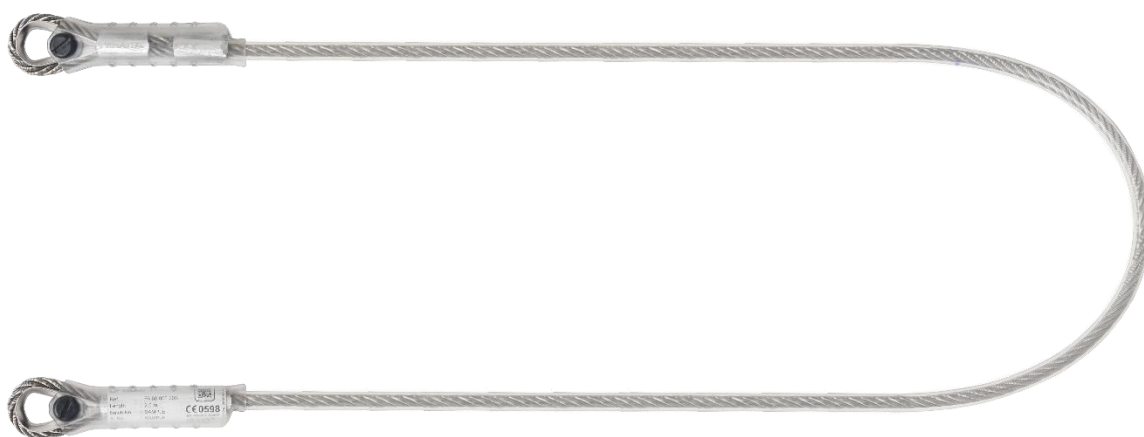

FA 60 0006 10/20:

PVC +  STEEL

FA 60 006 10S/20S:

 INOX

HS CODE
83081000
CARTON SIZE / PCS.
FA 60 006 10/S : 40 x 40 x 24 cm / 25
FA 60 006 20/S : 40 x 40 x 24 cm / 20
FA 60 006 XX: AET (UE) N°2777/10790-02/E03-01
FA 60 006 XXS: AET (UE) N°2777/10792-04/E01-01
Satra Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.01
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland
FA 60 006 XX: AET (UKCA) N°AB0321/16016-01/E01-01
FA 60 006 XXS: AET (UKCA) N°AB0321/16015-01/E01-01
Satra Technology Centre, N°0321 Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom
MODULE D 11 IN14/14003
SGS United Kingdom Ltd., N°0120 Unit 202B, Worle Parkway, Weston-super-Mare, BS22 6WA, United Kingdom

REF.	FA 60 006 10 FA 60 006 20 FA 60 006 10S FA 60 006 20S
CE	EN 795:2012 Type B
	x1
LG.	1.0 m 2.0 m 1.0 m 2.0 m
MAT.	PVC /  STEEL Ø 8.0 mm  INOX Ø 8.0 mm
R (kN) / MBS (kN)	12 kN / 25 kN
	0.56 kg 0.80 kg 0.46 kg 0.74 kg



Nombre d'utilisateurs
 Number of users
Cantidad de usuarios
 Cantidad de usuarios
 Quantità di utilizzatori
 Anzahl der Benutzer

R (kN) / MBS (kN)

Résistance statique (en kN) / Résistance à la rupture
 Static strength / Minimum Breaking Strength
Resistencia estática (en kN) / Resistencia a la ruptura (en kN)
 Resistenza statica (in kN) / Resistenza alla rottura (in kN)
 Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)